

BK3100 | PROFIBUS Bus Coupler

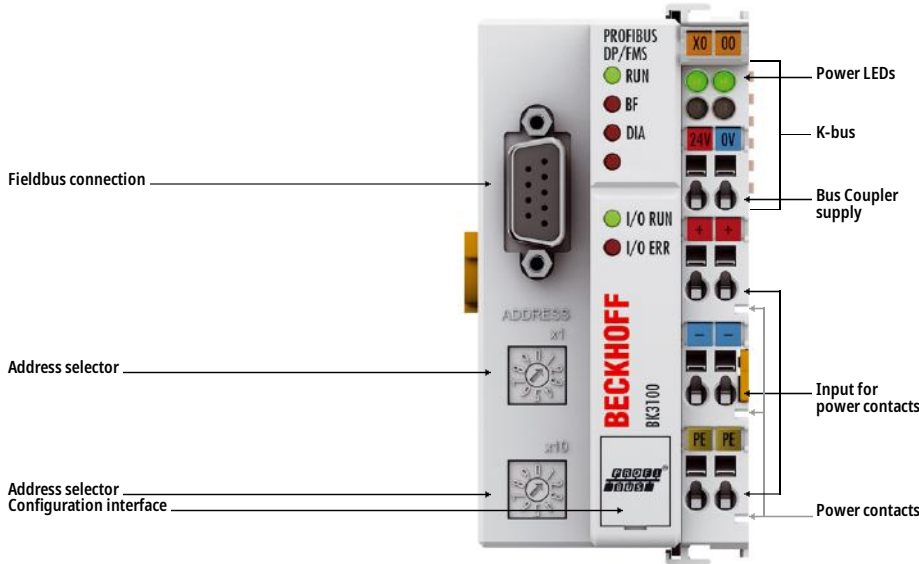


Image similar, may contain optional accessories

i Product status: regular delivery (not recommended for new projects) | recommended alternative: BK3120, BK3150

The BK3100 Bus Coupler connects the PROFIBUS system to the electronic terminal blocks, which can be extended in modular fashion. One unit consists of the Bus Coupler, any number of up to 64 terminals and one end terminal.

The Bus Coupler recognizes the connected terminals and automatically generates the affiliations of the inputs/outputs to the bytes of the process image. The first input/output signal is inserted in the first bit of one byte (LSB), beginning from the left. The Bus Coupler inserts further signals in this byte. Inputs and outputs are clearly separated. The Bus Coupler automatically begins a further byte if the number of inputs or outputs exceeds 8 bits.

The Beckhoff GSE and type data files to the Bus Couplers support the Bus Terminal options and can be loaded in the corresponding master configuration software to facilitate planning and design. Various configurations and parameters for the Bus Coupler can be selected via GSE and type data files.

Product information

Technical data

| Technical data | BK3100 |
|-------------------------------|---|
| Number of Bus Terminals | 64 |
| Max. number of bytes fieldbus | 64 byte input and 64 byte output (DP and FMS mode), 128 byte input and 128 byte output (only DP mode) |
| Digital peripheral signals | 512 inputs/outputs |

| | |
|-----------------------------------|--|
| Analog peripheral signals | 64 inputs/outputs (only DP mode) |
| Configuration possibility | via KS2000 or the controller |
| Data transfer rates | automatic detection up to 12 Mbaud |
| Bus interface | 1 x D-sub 9-pin socket with shielding |
| Data transfer medium | shielded copper cable, 2 x 0.25 mm ² |
| Power supply | 24 V DC (-15%/+20%) |
| Input current | 70 mA + (total K-bus current)/4, 500 mA max. |
| Starting current | 2.5 x continuous current |
| Recommended fuse | ≤ 10 A |
| Current supply K-bus | 1750 mA |
| Power contacts | max. 24 V DC/max. 10 A |
| Electrical isolation | 500 V (power contact/supply voltage/fieldbus) |
| Weight | approx. 170 g |
| Operating/storage temperature | 0...+55°C/-25...+85°C |
| Relative humidity | 95%, no condensation |
| Vibration/shock resistance | conforms to EN 60068-2-6/EN 60068-2-27 |
| EMC immunity/emission | conforms to EN 61000-6-2/EN 61000-6-4 |
| Protect. rating/installation pos. | IP20/variable |
| Approvals/markings | CE, UL, ATEX, IECEx, DNV GL |
| Ex marking | ATEX: II 3 G Ex ec IIC T4 Gc IECEx: Ex ec IIC T4 Gc |

| | |
|-----------------------------------|---|
| Housing data | BKxxxx, BCxxxx |
| Design form | compact terminal housing with signal LEDs |
| Material | polycarbonate |
| Dimensions (W x H x D) | 51 mm x 100 mm x 69 mm |
| Installation | on 35 mm DIN rail, conforming to EN 60715 with lock |
| Side by side mounting by means of | double slot and key connection |
| Marking | labeling of the BZxxx series |
| Wiring | solid conductor (s), flexible conductor (st) and ferrule (f): spring actuation by screwdriver |
| Connection cross-section | s*: 0.08...2.5 mm ² , st*: 0.08...2.5 mm ² , f*: 0.14...1.5 mm ² |
| Stripping length | 8...9 mm |
| Current load power contacts | I _{max} : 10 A |

*s: solid wire; st: stranded wire; f: with ferrule